Headquarters Europe

ASO GmbH Hansastraße 52 59557 Lippstadt GERMANY

Tel +49 2941 9793-0 Fax +49 2941 9793-299 www.asosafety.de sales-eu@asosafety.com



DOC0001073 Technical data Rev 00 as of 04 January 2023 Technical changes reserved

Headquarters USA

ASO Safety Solutions Inc. 350 N Frontage Road Landing, NJ 07850 USA

Phone +1 973 5869600 **Fax** +1 973 5861590 www.asosafety.com sales-us@asosafety.com

Headquarters Asia Pacific

ASO Safety Solutions Nanjing Co. Ltd. Jinma Lu 3 Maqun Scientific Park 210049 Nanjing CHINA

Phone +86 25 856 73990

www.asosafety.cn sales-cn@asosafety.com



SENTIR® edge

Safety Contact Edges



Product Information




Safety contact edges by ASO

SENTIR edge safety contact edges by ASO are pressure-sensitive sensors for safeguarding crushing and shearing points, for example on automated doors, machines or moving platforms, in order to protect men and material. Simple. Safe. Unique.

Our Plug'N'Sense System - Do It Yourself!

Our Plug'N'Sense self-assembly system has already been established in the market for more than 10 years. Without tools, a safety contact edge can be assembled within a few minutes - ready to mount.

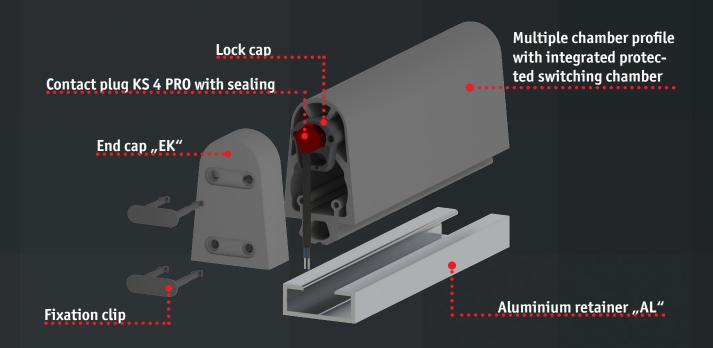

The certified system solution for your application!

SUSTAINABLE

Resource saving production, assembly and distribution

ECONOMICA

Fast and easy assembly thanks to ASO's Plug'N'Sense System:
Tool- and glue-free

HIGH PERFORMANC

Accelerated response behavior

DTVEDSE

Largest portfolio of active safety contact edges in the market

CERTIFIED

Patented double chamber system for a long life cycle

CUSTOMIZABLE

Extensive customization options through in-house development and production





WIDE TEMPERATUR RANGE



PROTECTION CLASS IP 67



WEATHER RESISTANT



FLAME RETARDENT



OIL RESISTANT



UV RESISTANT

Portfolio

Whether as 30m rolls, cut to the right length for self-assembly or already assembled and ready to use - our portfolio includes more than 90 standard profiles. Here you will find an overview of the dimensions with the different characteristics.

Height	Width	Base Shape			Sealing Lips		
					Ţ	J	Д
10	15	Х	Х				
25	15	Χ				Х	
30	25	Х				Х	X
45	25		Χ		X		Х
	35			Х		Х	
55	35		Х		X		
65	36			Х		Χ	
70	30	Х	Χ		Х		Х
85	35	X	X		X		X
	40			X		Х	
115	45			Х		Χ	
= T base (also available as small T-base) = Clips base = Lateral clips base		\int = Double-sided outwards \int = Single-sided inwards \int = Single-sided outwards					

In addition to the variants shown, numerous other profile types are available. Please contact us. Due to our in-house development, we are able to fulfill many customer requirements.